



Cable Master Electric Wire & Cable Co., Ltd

No. 46, Lane 344, Chung Hu St., Yingko Dist., New Taipei City, Taiwan

Tel: + 886-2-2670-5561 / +886-2-2670-1080
Website: www.cable-master.com.tw

Fax: +886-2-2670-5561
E-mail: Sales@cable-master.com.tw

CATEGORY 5e SF-UTP, 100MHz

STANDARD COMPLIANCE

UL LISTED: UL 444

ISO/IEC 11801 CATEGORY 5e: HORIZONTAL CABLE; PATCH CABLE

IEC 61156-5 FOR HORIZONTAL CABLE

IEC 60332-1-2 FLAME TEST

RoHS COMPLIANCE FOR THE REQUIREMENT OF EUROPEAN UNION ISSUED DIRECTIVE 2011/65/EU

UL VERIFIED TO IEC 62821-1 LSHF(Low-Smoke-Halogen-Free) JACKET



CONSTRUCTION

		CAT. 5e SF-UTP SOLID	CAT. 5e SF-UTP STRANDED
CONDUCTOR	MATERIAL & SIZE	BARE COPPER, 24AWG	BARE COPPER, 24AWG
INSULATION	MATERIAL	HDPE(CMI-75E)	HDPE(CMI-75E)
	THICKNESS	MIN. AVERAGE THICKNESS: 0.201mm MIN. THICKNESS: 0.175mm	MIN. AVERAGE THICKNESS: 0.201mm: MIN. THICKNESS: 0.175mm
	COLOR CODE	Pair 1: Blue & White/Blue Pair 2: Orange & White/Orange	Pair 3: Green & White/Green Pair 4: Brown & White/Brown
SHIELD	MATERIAL	DRAIN WIRE (TINNED COPPER) ALUMINUM-MYLAR TAPE TINNED COPPER BRAID	
JACKET	MATERIAL	75 ° C PVC Compound (CMI-80S) OR LSHF (Low-Smoke Halogen Free)	75 ° C PVC Compound (CMI-80S) OR LSHF (Low-Smoke Halogen Free)
	THICKNESS	MIN. AVERAGE THICKNESS: 0.585mm MIN. THICKNESS: 0.458mm	MIN. AVERAGE THICKNESS: 0.585mm: MIN. THICKNESS: 0.458mm
	OVERALL DIAMETER	6.2 MM +/- 0.3mm	6.2 mm +/- 0.3mm

ELECTRIC REQUIREMENT (CABLE LENGTH/100M)

	CAT. 5e SF-UTP SOLID	CAT. 5e SF-UTP STRANDED
CHARACTERISTIC IMPEDENCE(Zo)	85~115Ω (1~100 MHz)	85~115Ω (1~100 MHz)
DC. RESISTANCE CAPACITANCE UNBALANCE	5%	5%
PAIR-TO-GROUND CAPACITANCE UNBALANCE	330 pF/100M Max	330 pF/100M Max
CONDUCTOR RESISTANCE	9.38Ω/ 100M 20 ° C	8.76Ω/ 100M 20 ° C
MUTUAL CAPACITANCE	5600 pF/100M MAXIMUM	5600 pF/100M MAXIMUM
SPARK TEST	2.5KV	2.5KV
NOMINAL VELOCITY OF PROPAGATION (N.V.P.)	70%	76%



Cable Master Electric Wire & Cable Co., Ltd

No. 46, Lane 344, Chung Hu St., Yingko Dist., New Taipei City, Taiwan


Tel: + 886-2-2670-5561 / +886-2-2670-1080
Website: www.cable-master.com.tw

Fax: +886-2-2670-5561
E-mail: Sales@cable-master.com.tw

ENVIRONMENTAL CONDITION & USAGE

TEMPERATURE RANGE	SHIPPING & STORAGE	-20°C to 75°C
	INSTALLATION	0°C to 60°C
	OPERATION	-20°C to 75°C
MINIMUM BENDING RADIUS	≥ 4 TIMES OF OVERALL DIAMETER	
MAXIMUM PULLING TENSION	≤ 110 N	

SECTION PLANS

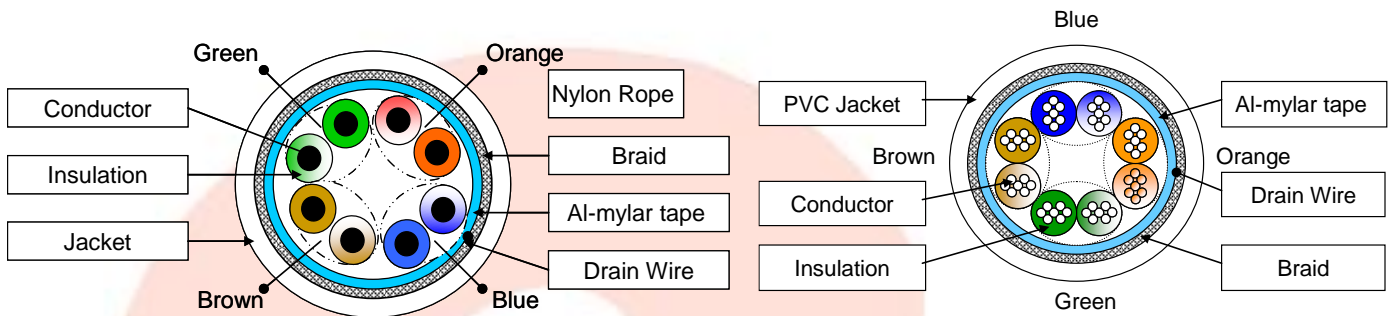

TRANSMISSION REQUIREMENTS

FREQUENCY (MHz)	MAX. ATTENUATION (dB/100m)		MIN, Pr-Pr NEXT (dB)	MIN. PSNEXT (dB)	MIN. RETURN LOSS (dB)	
	SOLID	STRANDED			SOLID	STRANDED
1	2.8	2.8	65.3	62.3	20.0	20.0
10	7.9	7.8	50.3	47.3	25.0	25.0
16	9.4	9.9	47.3	44.4	25.0	25.0
20	10.7	11.1	45.8	42.8	25.0	25.0
25	11.8	12.5	44.4	41.3	24.3	24.2
31.25	13.4	14.1	42.9	39.9	23.6	23.3
62.5	18.9	22.4	38.4	35.4	21.5	20.7
100	24.2	26.4	35.3	32.3	20.1	19.0

Values show on tables above are for reference purpose only.